



This flagship universal disc player is the embodiment of Pioneer's considerable expertise amassed over the years through the development of successive optical disc players. Elaborately engineered for the ideal disc playback, the UDP-LX800 features extremely rigid construction to achieve high S/N ratio for quality audio and video performance. With support for the latest Ultra HD Blu-ray™ format, you can enjoy the beautiful spectacle with four times the resolution of 1080p Full HD. Two ESS SABRE PRO Series DACs are used in parallel to provide audiophile sound. Other features include SDR/HDR Preset Mode, Direct/Transport Function, and XLR balanced output terminal.

CONSTRUCTION

- › Three-Block Internal Layout (Power Supply, Drive/Digital Processing, Analogue Audio)
- › Ultra-Rigid Construction with Ventless Steel Plate Top Panel and Aluminium Side Panels
- › 3 mm Steel Plate Rigid Under Base for Rigidity and Low Centre of Gravity
- › 6-Layered IVH Main Circuit Board for High S/N Ratio
- › Rigid & Quiet BD Drive
 - Honeycomb Mechanism Drive Cover with Anti-Vibration Paint
 - Acoustic Damper Tray with Anti-Vibration Paint
 - Float-Mounting Structure
- › Anti-Standing Wave Insulators

VIDEO FEATURES

- › Ultra HD Blu-ray Playback
- › 4 Presets According to Display Type, with Automatic Detection/Switching for SDR/HDR Signals
- › Video Adjust
- › HDR10
- › Dolby Vision (Low Latency Compatible)
- › 36-bit Deep Colour/"x.v.Colour"

AUDIO FEATURES

- › 8ch Parallel Drive with SABRE ES9026PRO DAC x 2
- › Large-Capacity Power Supply Transformer
- › Custom Electrolytic Capacitors
- › Direct Function for Pure Analogue Audio Output
- › Transport Function for Pure Digital Audio/Video Output
- › Dual HDMI Output
- › PQLS Jitter-less Sound Transmission via HDMI (with compatible AV Receiver)

CONVENIENCE

- › Disc/HDMI/HDR Information On-Screen Display
- › BD-Live/BONUSVIEW
- › Continued Viewing Playback
- › 30 sec Skip Forward/10 sec Skip Back
- › Auto Power Off
- › Firmware Update (USB/Network)
- › Self-Illuminating Remote Control

PLAYBACK MEDIA

- › BD-ROM (UHD BD/3D BD/BD)/BD-R (DL)/BD-R LTH/BD-RE (DL)
- › DVD-ROM (DVD-Video/DVD-Audio)/DVD-R (DL)/DVD-RW/DVD+R (DL)/DVD+RW
- › Audio CD (CD-DA/SACD)/CD-ROM/CD-R/CD-RW
- › USB Memory/HDD

TERMINALS

- › HDMI 2 Out (1 Main for Audio/Video, 1 Sub for Audio)
- › Digital Coaxial Out
- › Digital Optical Out
- › USB 2 In (1 Front, 1 Rear)
- › Ethernet
- › RS-232C
- › Analogue Audio Out (RCA Unbalanced, XLR Balanced)
- › Zero Signal Terminal (for Audio/Video Quality Tuning)

SPECIFICATIONS

- › Power Requirements: AC 220-240 V, 50/60 Hz
- › Power Consumption: 42 W
- › Power Consumption During Standby: 0.45 W (Full)/1.4 W (Network Standby On)
- › Dimensions (W X H x D): 435 x 131 x 339 mm
- › Weight: 13.8 kg



Three-Part Chassis Structure

The blocks for power supply, drive/digital processing, and analogue audio are separated into three to eliminate electrical and magnetic interference between the blocks. The rigid beams placed between the blocks further reinforce the structure, while the internal layout is optimally designed to minimize vibration and signal loss.



Ultra-Rigid Construction with Ventless Steel Plate Top Panel and Aluminium Side Panels

Even the holes for heat radiation are excluded to realise a flat form with optimal electric circuit design, to minimise the mechanical motion sound from the BD drive. The result is significantly low noise and even more rigid and stable chassis structure.




Rigid Under Base for Rigidity and Low Centre of Gravity

The 1.6 mm-thick chassis base is reinforced with a 3 mm-thick steel plate Rigid Under Base. This Double-Layered Chassis structure provides a low centre-of-gravity and overall rigidity that prevents the transfer of external vibration to the inner chassis, and offers a superior reading of the disc.

Large-Capacity Power Transformer and Power Supply Circuitry

The dedicated large-capacity power transformer for the analogue audio circuitry and the custom capacitor constitute the superior power circuitry capable of instantaneous power supply. The unnecessary electromagnetic wave generated by the transformer is confined within the copper-plated shield case with anti-vibration paint. The f-hole-shaped embossing also helps to suppress standing-waves within the case, thereby achieving sound quality with both dynamic and silent features. The power supply circuitry has a case with an F clef emboss for suppressing standing waves, and black anti-vibration paint, allowing stable and high-quality power supply to the drive and digital blocks.




Universal Disc Player with Ultra HD Blu-ray Playback

As a universal disc player, the UDP-LX800 can play various optical discs including the latest disc format Ultra HD Blu-ray which has four times the resolution of 1080p Full HD, as well as Hi-Res Audio and other music files, and video files.


6-Layered Main Circuit Board for High S/N Ratio

A 6-layered IVH is used for the main circuit board to thoroughly eliminate digital noise. This optimises the digital signal wiring and minimises GND impedance, and dramatically improves S/N ratio in audio/video signal processing. The maximum 18 Gbps transmission through the latest HDMI standard becomes even more precise.

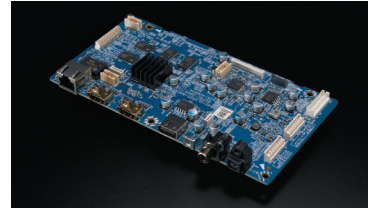

Audio Circuitry for Quality Sound

The technologies for Pioneer's SACD player PD-70AE is incorporated to further improve the analogue audio block. The paths for L and R signals are made identical including the pattern and parts layout. The L/R signal balance is strictly maintained, resulting in evermore precise and superior separation during playback. The bus bar between L and R signals also help to stabilize the ground.

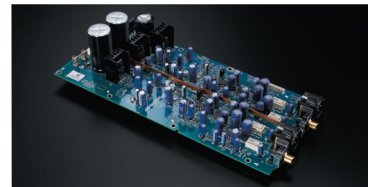

SDR/HDR Preset Mode for Optimal Performance for the Display

In addition to the video parameter "Reference" for reproducing the master quality, you can select "LCD TV," "OLED TV," or "Projector" for the video quality best suited to your display. Additionally, there are SDR/HDR presets for each video parameter, that automatically switches between SDR preset and HDR preset according to the output signal.


Disc Information On-Screen Display

You can display the disc information on your screen by pressing and holding the remote control's DISPLAY button. In addition to the playing disc's details, you can easily check mastering information such as MaxFALL (Maximum Frame Average Light Level) and MaxCLL (Maximum Content Light Level) available on some HDR content, as well as HDMI output information.

Media Information		HDR Information	
Resolution	3840 x 2160	Mastering Display	
Frame Rate	23.976p	Chromaticity (white)	x = 0.313, y = 0.329
HDR Format	HDR10	Chromaticity (blue)	x = 0.061, y = 0.320
Color Space	BT 2020 YCbCr4:2:0	Chromaticity (green)	x = 0.265, y = 0.690
Color Depth	10bit	Chromaticity (cyan)	x = 0.155, y = 0.505
Video Format	HEVC	Max. Light Level	4000cd
Video Bitrate	50.7 Mbps	Min. Light Level	0.000cd
Audio Format	Dolby TrueHD Multi 48K	Max. Content Light Level	1888cd
Audio Bitrate	2641.6 Kbps	Max. Frame-average Light Level	1500cd
Audio Channel	Multi	Electro-Optical Transfer Function	BT 2020

Transport Function for Pure Digital Audio/Video Output

The function completely turns off the analogue audio circuitry from power supply to output, by cutting the power supply to the transformer during HDMI connection. The HDMI's S/N ratio further improves and realises high-quality audio and video playback.



Transport On (Digital only)



•PIONEER and the Pioneer logo are registered trademarks of Pioneer Corporation, and are used under license. •The DVD logo is a trademark of DVD Format/Logo Licensing Corporation. •"Super Audio CD" is a trademark. •DSD and the Direct Stream Digital logo are trademarks of Sony Corporation. •"x.v.Colour" is a trademark of Sony Corporation. •"AVCHD" and the "AVCHD" logo are trademarks of Panasonic Corporation and Sony Corporation. •Dolby, Dolby Surround, Dolby Vision, and the double-D symbol are trademarks of Dolby Laboratories. •For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, DTS-HD, the Symbol, DTS-HD in combination with the Symbol are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. © DTS, Inc. All Rights Reserved. •The product with the Hi-Res Audio logo is conformed to Hi-Res Audio standard defined by Japan Audio Society. The logo is used under license from Japan Audio Society. •Blu-ray Disc™, Blu-ray™, BD-LIVE™, BONUS VIEW™, Ultra HD Blu-ray™ word marks and logos are trademarks of the Blu-ray Disc Association. •ULTRA HD PREMIUM™ logo is a trademark or registered trademark of the UHD Alliance, Inc. in the United States and other countries.

All other trademarks and registered trademarks are the property of their respective holders.

© 2018 Onkyo & Pioneer Corporation. All rights reserved.
Note: Specifications and design subject to change without notice.